

Series 5322 Two-Piece Threaded Ball Valves

The PBV® Series C5322/S5322 Two-Piece Threaded Floating Ball Valves

Standard Features


- 2220 WOG For WCB, 2160 WOG For CF8M
- Seal Welded Construction
- Blow-Out Proof Stem
- ISO Actuator Mounting Pads On All Sizes
- Available In WCB or Stainless Steel Body
- 316 Stainless Steel Ball and Stem
- Meets NACE MR0175 2002, ASME B16.34, Class 900 and API 608
- Fire Tested To API 607
- Stainless Steel Locking Handle
- Reinforced PTFE Seats

Available Options

- Oval Handle



Dimensional Data

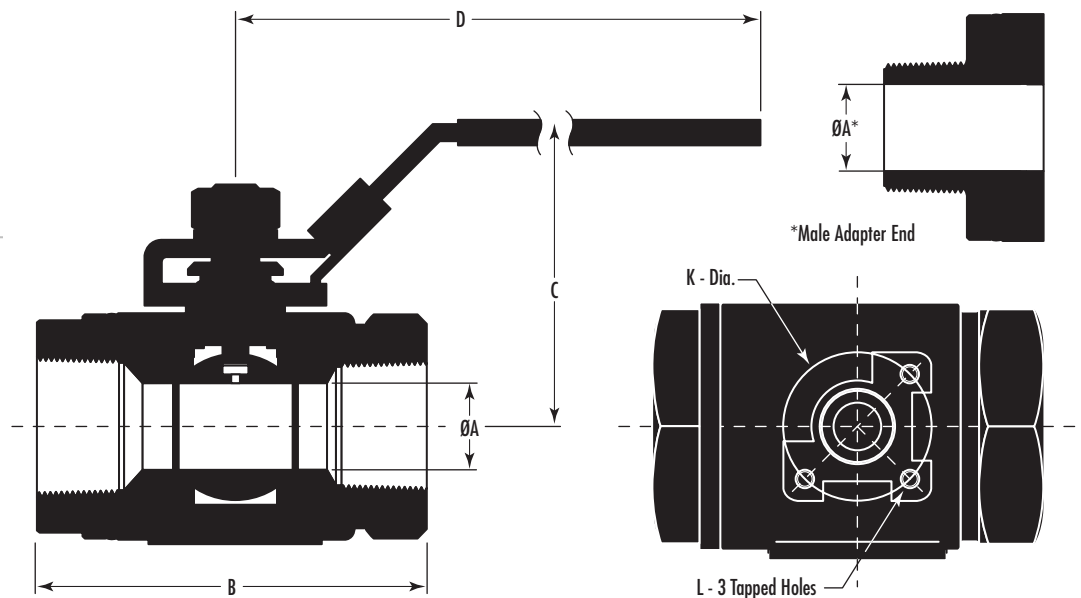

5322 Dimensional Data (in.), Cv Data and Weight (lbs.) ■ 1/4"-2"

Size (in.)	Dimensions						ISO Pattern	Cv	Appx. Wt. (lbs.)
	A	B	C	D	L=3 Tapped Holes	K Dia.			
1/4 - 3/8	0.43	2.72	1.94	5.28	1/4-20 UNC	1.42	F03	6.30	1.00
1/2	0.43	2.95	1.94	5.28	1/4-20 UNC	1.42	F03	15.00	1.00
3/4	0.59*	3.74	2.57	5.28	1/4-20 UNC	1.65	F04	25.00*	1.80*
1	0.79	4.13	2.73	6.60	1/4-20 UNC	1.65	F04	40.00	2.50
1 1/4	1.00	4.57	3.20	7.28	1/4-20 UNC	1.97	F05	52.00	3.90
1 1/2	1.26	4.94	3.40	7.28	1/4-20 UNC	1.97	F05	80.00	5.50
2	1.50	5.73	3.56	7.28	1/4-20 UNC	1.97	F05	115.00	8.50

*NOTE: M X F valve design: 3/4", "A" dimension = 0.69". Cv=25.0. Approx. Wt.= 1.80 lbs.