


Series 6500 Dimensional Data, Class 150, 300 & 600

Dimensional Data (in.)

Test Pressure	Shell (hydrostatic)	Seat (air)	Seat (hydrostatic)
Class 150	450 psi	80 psi	320 psi
Class 300	1125 psi	80 psi	825 psi
Class 600	2250 psi	80 psi	1650 psi

Series 6500, 1" - 6", Class 150, 300 & 600 (in.)

Valve Size	A	C	D	E	F	G	NxØH	I	J	L
	Class 150, 1"-6"									
1	0.97	2.00	4.25	0.06	0.44	5.00	4 x Ø.62	3.12	4.34	7.50
1 1/2	1.50	2.88	5.00	0.06	0.56	6.50	4 x Ø.62	3.88	5.00	9.00
2	2.00	3.62	6.00	0.06	0.62	7.00	4 x Ø.75	4.75	6.23	16.50
3	3.00	5.00	7.50	0.06	0.75	8.00	4 x Ø.75	6.00	7.10	16.50
4	4.00	6.19	9.00	0.06	0.94	9.00	8 x Ø.75	7.50	7.75	19.70
6	6.00	8.50	11.00	0.06	1.00	15.50	8 x Ø.88	9.50	9.56	43.00
Class 300, 1"-6"										
1	0.97	2.00	4.88	0.06	0.69	6.50	4 x Ø.75	3.50	4.34	7.50
1 1/2	1.50	2.88	6.12	0.06	0.81	7.50	4 x Ø.88	4.50	5.00	9.00
2	2.00	3.62	6.50	0.06	0.88	8.50	8 x Ø.75	5.00	6.23	16.50
3	3.00	5.00	8.25	0.06	1.12	11.12	8 x Ø.88	6.62	7.10	16.50
4	4.00	6.19	10.00	0.06	1.25	12.00	8 x Ø.88	7.88	7.75	19.70
6	6.00	8.50	12.50	0.06	1.44	15.88	12 x Ø.88	10.62	9.56	43.00
Class 600, 1"-6"										
1	0.97	2.00	4.88	0.25	0.95	8.50	4 x Ø.75	3.50	4.34	7.50
1 1/2	1.50	2.88	6.12	0.25	1.13	9.50	4 x Ø.88	4.50	5.00	9.00
2	2.00	3.62	6.50	0.25	1.28	11.50	8 x Ø.75	5.00	6.23	16.50
3	3.00	5.00	8.25	0.25	1.50	14.00	8 x Ø.88	6.62	7.11	19.70
4	4.00	6.19	10.75	0.25	1.75	17.00	8 x Ø.100	8.50	8.30	43.00

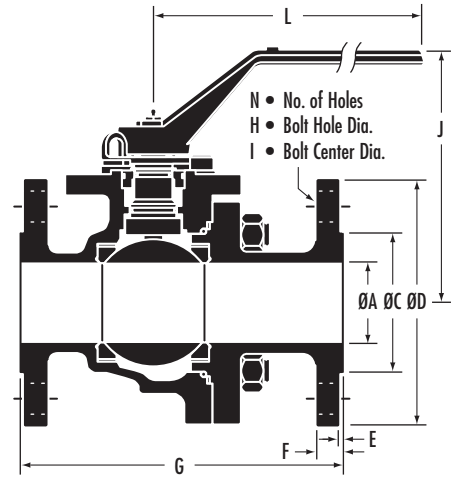

Computerized Inventory Keeps Your Order On Time

PBV®'s computerized inventory control insures the parts for your order are in stock and ready for assembly.

All parts and assemblies are tracked and inspected throughout the entire manufacturing process, assuring your order arrives on time and ready for immediate installation.

